

SPRING-LOADED CONNECTORS

SERIES 856, 857 • 1,27 GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE AND DOUBLE ROW STRIPS

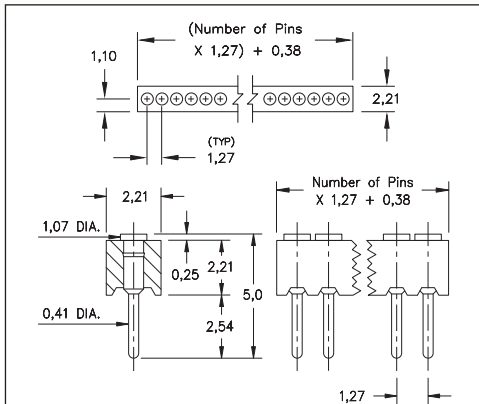


FIG. 1

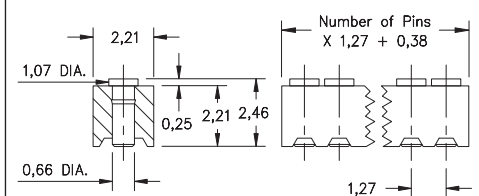


FIG. 2

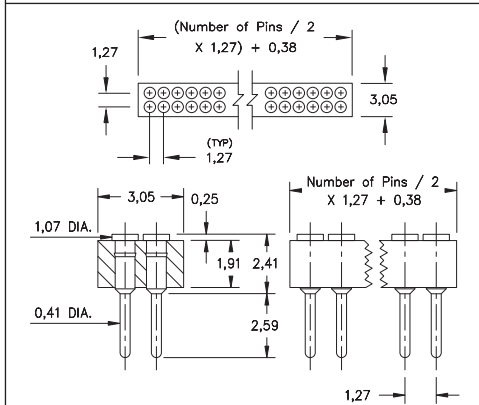


FIG. 3

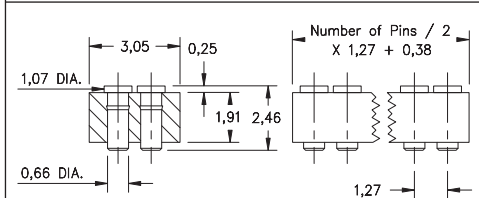
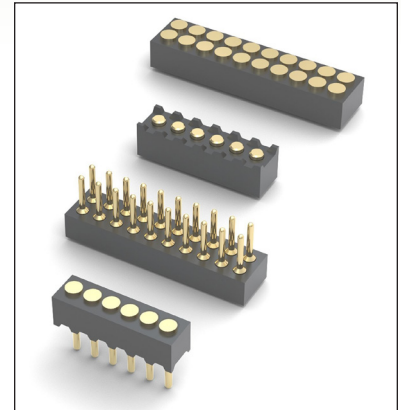







FIG. 4

- Series 856 and 857 Target Connectors, SMT & through-hole, supplied in single and double row strips
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a flat face for making contact with our standard 0,48 dia. spring pin plungers
- Target connectors use MM #1933 (through-hole) and #1935 (surface mount) pins. See page 223.2 for details
- Insulators are high temperature thermoplastic



ORDERING INFORMATION

	Series 856...051	Flat face / Solder Tails
FIG. 1	856-10-0	-10-051000 Specify number of pins 01-20
FIG. 2	Series 856...051	Flat face / Surface Mount
	856-10-0	-30-051000 Specify number of pins 02-20
FIG. 3	Series 857...051	Flat face / Solder Tails
	857-10-0	-10-051000 Specify number of pins 04-40
FIG. 4	Series 857...051	Flat face / Surface Mount
	857-10-0	-30-051000 Specify number of pins 04-40
  		
SPECIFY PLATING CODE XX=		10 
Pin Plating		0,25µm Au